

WHI941ST

gorenje
Life Simplified

Freestanding wall decorative cooker hood



LedLight



Timer and refresh



P.A.S. System




TouchFree coating



TouchControl



AdaptTech

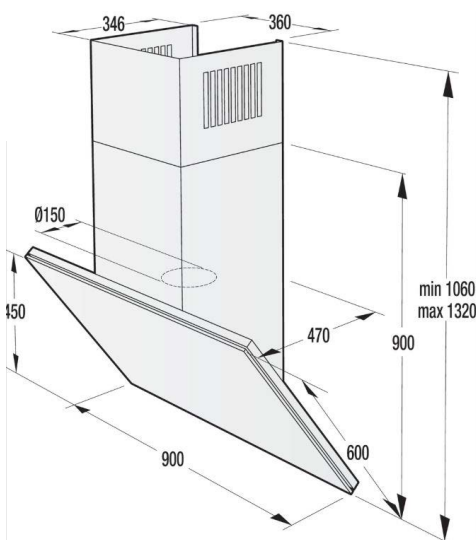

Wall mounted cooker hood

Venting with air extraction or recirculation

Energy class: **B**

Material of housing/chimney: **stainless steel and glass / stainless steel**

Colour of housing/chimney: **stainless steel / stainless steel**

Lightning efficiency class: **E**

Grease filtering efficiency class: **A**

Fluid dynamic efficiency class: **A**

Maximum extraction rate by extraction operation: **508 m³/h**

Maximum extraction rate by recirculation operation: **485 m³/h**

Venting tube diameter: **15 cm**

Air flow by extraction version, step 1: **250 m³/h**

Air flow by extraction version, step 2: **364 m³/h**

Air flow by extraction version, step 3: **508 m³/h**

AdaptTech: Automatic fan operation

TouchFree Inox

Electronic control

Constant ventilation ReFresh

Control setting: **Touch control**

Lamp type: **Led strip**

Timer function

On/off light switch

Number of speed positions: **3**

Number of lights: **1**

Air purifying function

Power of lights: **6 W**

Airflow boost position (PowerBoost 1) - extraction: **663 m³/h**

Airflow boost position (PowerBoost 2) - extraction: **732 m³/h**

Perimetric suction

Filter material: **Aluminium**

Grease filter indicator

Coal filter code (optional as separate purchase): **182183**

Recirculation set number: **525362**

Washable grease filter

Motor type: **Capacitor motor**

Number of motors: **1**

Number of PowerBoost functions: **2**

No return airflow flap: **150 mm**

Max. noise level: **59 dB(A)re 1 pW**

Height: **450 mm**

Min. height of the chimney: **995 mm**

Max. height of the chimney: **1,275 mm**

Annual energy consumption: **50.8 kWh**

Dimensions (WxHxD): **90 x 45 x 47 cm**

Dimensions of packed product (WxHxD): **102.7 x 60.2 x 79.3 cm**

Net weight: **32 kg**

Product code: **498347**

Gross weight: **38.3 kg**

EAN code: **3838942049248**

Connected load: **284 W**

Nominal current of fuse: **10 amp**



<https://eg.gorenje.com/en/product/498347>